

# Broad Band Voltage Variable Attenuator

# NON-CATALOG

# RVA-3000+

50Ω 20 to 3000 MHz


## Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	12V
Absolute Max. Control Voltage(Vctrl)	20V
Absolute Max. RF Input Level	+26 dBm
Permanent damage may occur if any of these limits are exceeded.	

## Pin Connections

RF IN	2
RF OUT	10
V CONTROL	6
V+	14
GROUND	1,3,4,5,7,8,9,11,12,13,15,16

## Outline Drawing

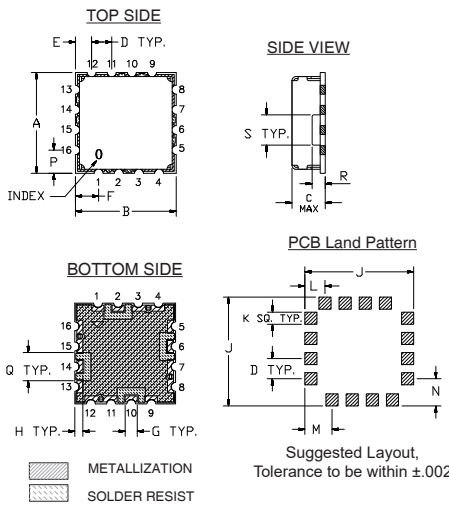


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.500	.500	.195	.100	.080	.115	.060	.040	.540
12.70	12.70	4.95	2.54	2.03	2.92	1.52	1.02	13.72

K	L	M	N	P	Q	R	S	wt.
.060	.100	.135	.135	.115	.140	.070	.150	grams
1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.0

## Demo Board MCL P/N: TB-163 Suggested PCB Layout (PL-040)

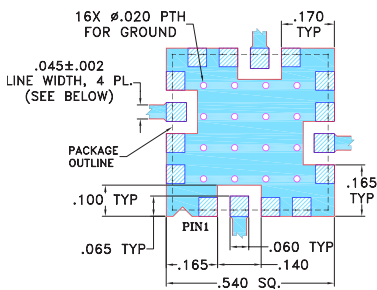

- NOTE:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- Legend:  
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- Broadband, 20-3000 MHz, could be used up to 4000MHz
- IP3, +55 dBm typ.
- Good VSWR at IN/OUT ports over attenuation range
- Fast Rise/Fall Time, 5µSec/4µSec Typ.
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case
- Aqueous washable

## Applications

- Power level control
- Feed forward amplifiers



Generic photo used for illustration purposes only

CASE STYLE: DV874

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Electrical Specifications (T<sub>AMB</sub> = 25°C)

FREQ. (MHz)	MIN. INSERTION LOSS, dB (+17V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Typ.	Max.			Typ.	Max.
20 - 500	2.8	3.5	56	39	+26	0 - 17	30	48	23	+5	10
500 - 1500	3.0	4.0	40	28	+26	0 - 17	30	56	26	+5	10
1500 - 3000	3.6	5.0	29	22	+26	0 - 17	30	57	21	+5	10


## Notes:

- Rise/Fall time: 5µSec/4µSec Typ.
- Switching Time, turn on/off: 6µSec. Typ.

## Equivalent Schematic

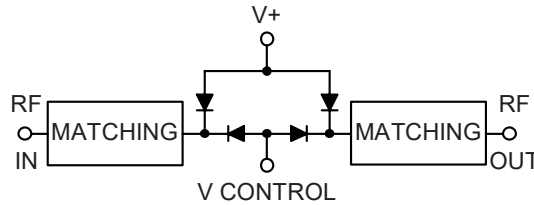

## RVA-3000+ TYPICAL ATTENUATION AT 500 MHz

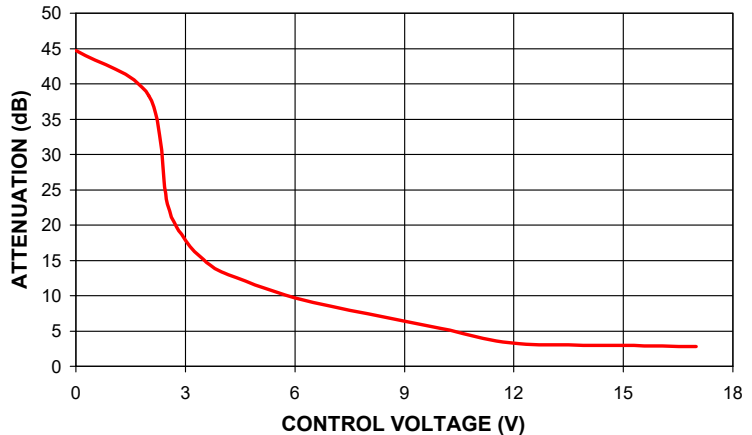


## Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




**RVA-3000+**  
**ATTENUATION Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES**

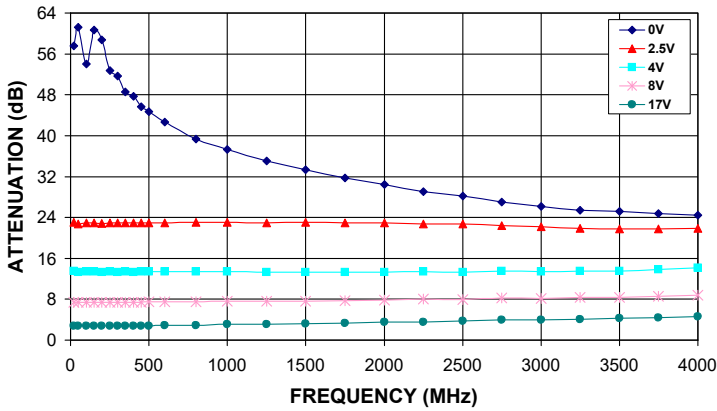


**RVA-3000+**  
**ATTENUATION Vs. INPUT POWER**  
**OVER CONTROL VOLTAGES AT 500MHz**

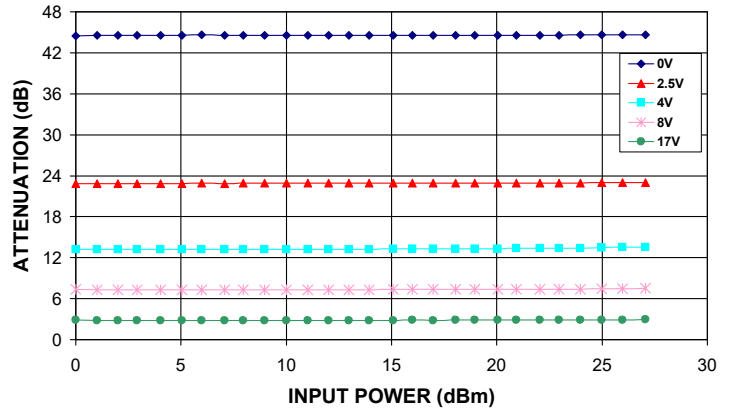


**RVA-3000+**  
**INPUT RETURN LOSS Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES**

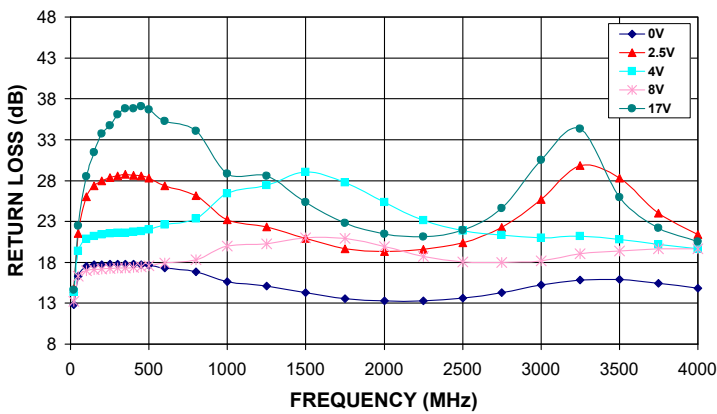


**RVA-3000+**  
**OUTPUT RETURN LOSS Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES**

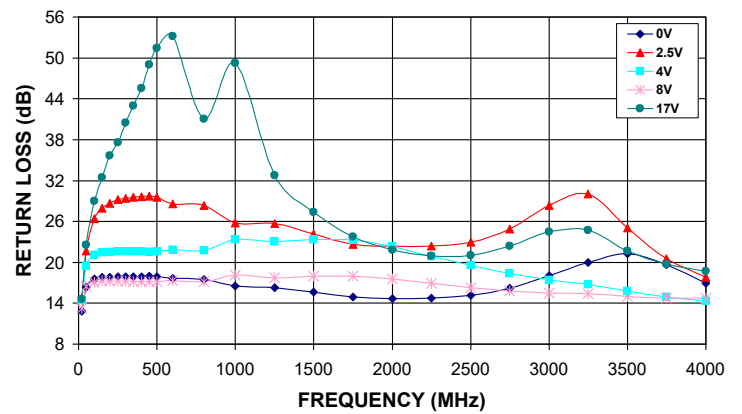

**RVA-3000+**  
**IP3 Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES**

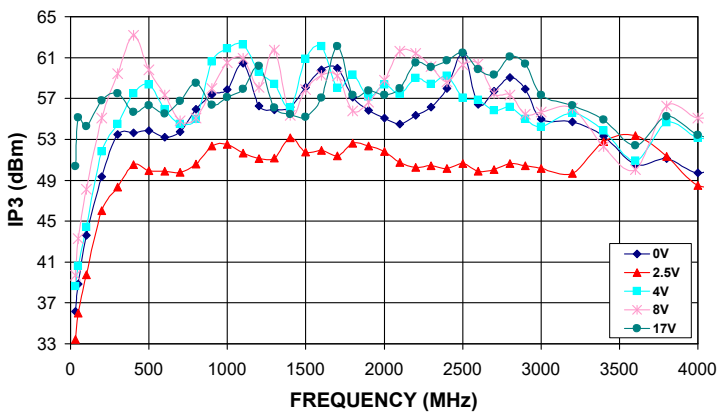

**RVA-3000+**  
**PHASE SHIFT Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES**

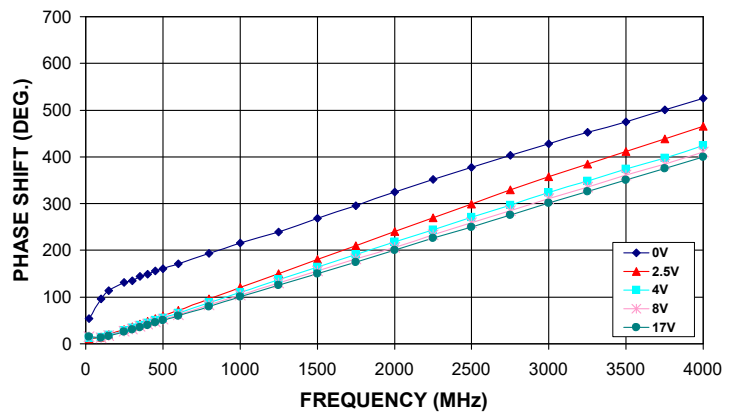

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

