

Bandpass Filter

BPF-B140N+

50Ω 137 to 143 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	2
GROUND	3, 4, 5, 6


Outline Drawing

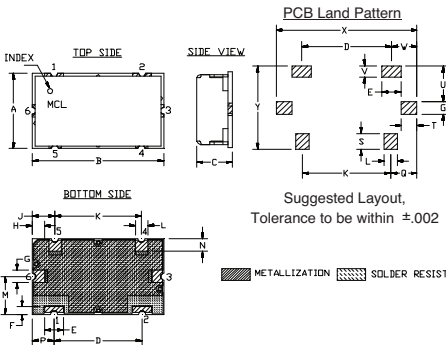

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472"	.826"	.220"	.551"	.118"	.047"	.078"	.076"	.142"	.543"	.078"	.236"
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.92	3.61	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y		wt
.079"	.138"	.162"	.098"	.096"	.217"	.067"	.157"	.866"	.512"		grams
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00		6.0

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

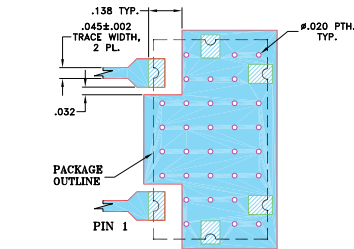


- NOTES:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- Excellent rejection
- Flat group delay @ passband
- Good VSWR, 1.3:1 typ. @ passband

Applications

- Receivers/transmitters
- PMR / PAMR
- Base station



CASE STYLE: HZ1198
PRICE: \$15.95 ea. QTY (1-9)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 6dB) F1 - F2	STOPBANDS (MHz)				VSWR (:1)	
		Loss > 20dB F3	Loss > 40dB F4	F5	F6	Passband Max.	Stopband Typ.
140	137 - 143	126	154	119	165 - 1500	1.6	30

Typical Frequency Response



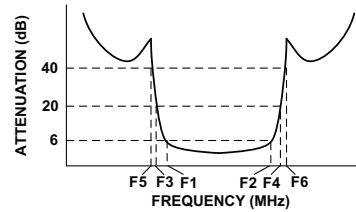


Functional Schematic

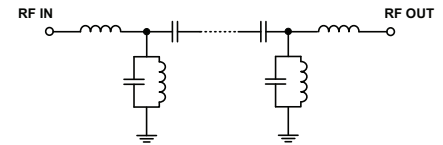

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB) \bar{x}	σ	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
1.0	84.10	3.17	0.67	135.0	96.41
119.0	51.15	0.38	0.25	136.0	90.34
126.0	35.29	0.32	0.57	137.0	83.07
130.0	22.83	0.33	1.41	137.5	79.66
133.0	11.59	0.34	4.96	138.0	78.33
134.0	8.44	0.29	8.99	138.5	76.61
137.0	4.71	0.08	19.03	139.0	75.42
140.0	4.32	0.07	27.57	139.5	74.79
143.0	4.83	0.08	20.72	140.0	74.28
146.0	9.03	0.34	8.53	140.5	74.18
148.0	15.72	0.39	3.44	141.0	74.84
154.0	32.74	0.33	1.01	141.5	75.90
165.0	51.19	0.44	0.43	142.0	76.78
200.0	76.29	2.43	0.15	142.5	78.59
400.0	80.32	3.07	0.07	143.0	81.75
800.0	81.57	3.51	0.13	143.5	85.13
1000.0	77.76	4.06	0.16	144.0	88.85
1500.0	66.03	1.78	0.24	145.0	92.31

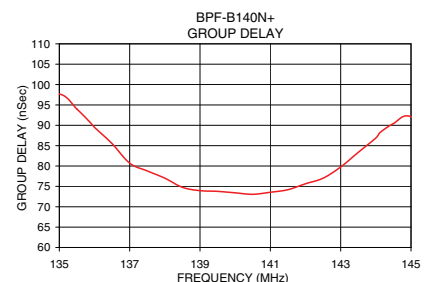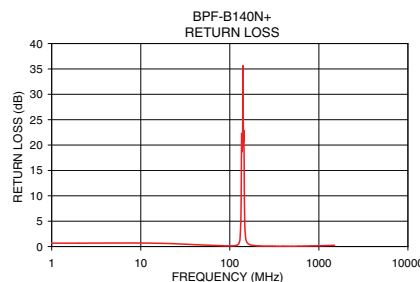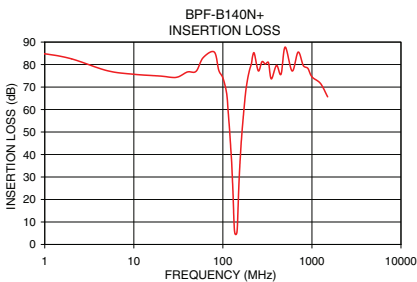

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. OR
M112306
EDR-8639/1UF1
BPF-B140N+
URJ/RAV
121011
Page 1 of 1