

Power Splitter/Combiner

LRPQ-700

2 Way-90° 50Ω 500 to 700 MHz



CASE STYLE: QQQ130
PRICE: \$9.95 ea. QTY (1-9)


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.


Pin Connections

SUM PORT	6
PORT 1 (0°)	4
PORT 2 (+90°)	1
GROUND	2,5
50 OHM TERM EXTERNAL	3

Outline Drawing

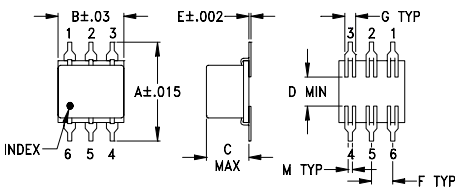

PCB Land Pattern




Suggested Layout,
Tolerance to be within $\pm .002$

Outline Dimensions (inch)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27
H	J	K	L	M		wt
.420	.120	.060	.100	.020		grams
10.67	3.05	1.52	2.54	0.51		0.55

Demo Board MCL P/N: TB-226
Suggested PCB Layout (PL-140)



NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.2 dB typ.
- excellent phase unbalance 1 deg. typ.
- aqueous washable

Applications

- modulators
- UHF
- signal processing
- balanced amplifiers
- instrumentation




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
500-700	23 18	0.2 0.6	3	1.8


LRPQ units have bottom barrier ground plane insulated with glass barrier.

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500.00	2.51	3.96	1.45	25.13	89.53	1.13	1.09	1.13
510.00	2.57	3.86	1.28	25.04	89.47	1.13	1.10	1.13
520.00	2.63	3.77	1.14	24.93	89.55	1.14	1.10	1.13
535.00	2.72	3.63	0.92	24.75	89.57	1.14	1.10	1.14
550.00	2.84	3.54	0.70	24.62	89.56	1.15	1.11	1.15
565.00	3.00	3.47	0.47	24.54	89.51	1.16	1.12	1.15
580.00	3.05	3.35	0.30	24.31	89.40	1.16	1.12	1.16
595.00	3.14	3.24	0.11	24.14	89.62	1.17	1.13	1.17
610.00	3.23	3.16	0.07	23.97	89.60	1.18	1.13	1.17
625.00	3.33	3.07	0.26	23.77	89.67	1.19	1.14	1.18
640.00	3.41	2.97	0.44	23.55	89.64	1.20	1.14	1.19
660.00	3.56	2.90	0.66	23.32	89.71	1.21	1.15	1.20
680.00	3.68	2.80	0.88	23.03	89.71	1.22	1.16	1.21
690.00	3.74	2.77	0.97	22.91	89.71	1.22	1.16	1.21
700.00	3.83	2.76	1.07	22.79	89.73	1.23	1.17	1.22

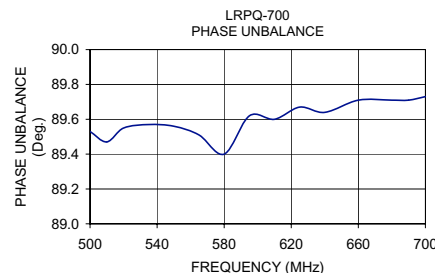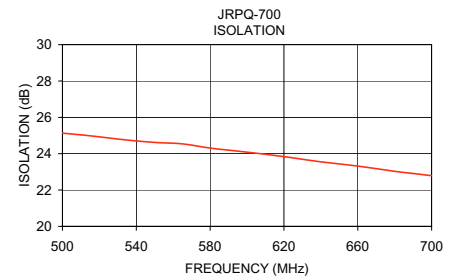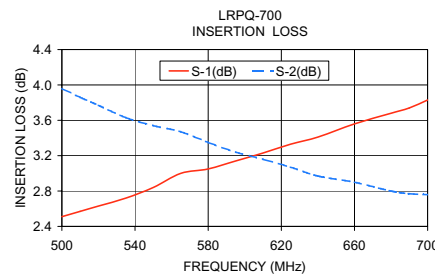

electrical schematic



ALL NEW
minicircuits.com

REV. B
M105445
LRPQ-700
HY/TD/CP
070530

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS