

Frequency Mixer WIDE BAND

MCA1-60LH+

Level 10 (LO Power+10 dBm) 1700 to 6000 MHz



CASE STYLE: DZ885
PRICE: \$8.45 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Features

- wide bandwidth, 1700 to 6000 MHz
- useable to 8000 MHz
- low conversion loss, 6.2 dB typ.
- IF, DC to 2000 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

Applications

- PCN
- defense & weather radar
- WCDMA
- defense communications


Electrical Specifications (T_{AMB}=-55°C to 100°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _c -f _u	IF	\bar{X}	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
1700-4400	DC-2000	6.6	0.1	7.9*	35	23	17	—	13
4400-6000	DC-2000	6.0	0.1	8.3*	27	20	21	—	11


1 dB COMPR. +5 dBm typ.

*Conversion loss at 30 MHz IF, increases with IF frequency. See Graphs

Outline Drawing

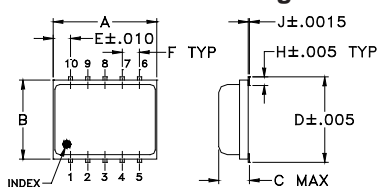

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	
.30	.250	.085	.266	.050	.050	.012	
7.62	6.35	2.16	6.76	1.27	1.27	0.30	
H	J	K	L	M		wt	
.029	.004	.085	.296	.030		grams	
0.74	0.10	2.16	7.52	0.76		0.25	

Demo Board MCL P/N: TB-144

Suggested PCB Layout (PL-045)




NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
1700.00	1730.00	6.12	31.11	17.21	2.04	3.80
1900.00	1930.00	5.58	41.49	18.61	2.25	2.23
2100.00	2130.00	5.56	36.04	17.55	2.45	1.85
2500.00	2530.00	5.57	34.25	17.48	2.19	1.72
2700.00	2730.00	5.54	36.00	18.36	2.22	1.90
2900.00	2930.00	5.92	40.21	18.81	3.68	2.18
3100.00	3130.00	6.80	36.38	18.44	5.02	2.63
3300.00	3330.00	6.75	35.64	17.41	3.64	2.73
3500.00	3530.00	6.51	34.52	14.61	4.06	3.26
3700.00	3730.00	6.81	34.43	12.04	3.26	3.62
3900.00	3930.00	6.24	35.17	14.87	2.71	3.93
4100.00	4130.00	6.49	37.36	15.93	2.04	2.62
4300.00	4330.00	6.05	37.95	18.73	1.83	2.45
4500.00	4530.00	5.97	34.27	19.90	1.93	2.66
4700.00	4730.00	5.76	32.31	21.16	1.47	2.76
4900.00	4930.00	6.58	34.11	22.13	2.70	1.96
5100.00	5130.00	5.50	29.13	22.12	1.90	1.35
5300.00	5330.00	5.92	27.47	22.67	2.24	1.37
5700.00	5730.00	5.76	26.99	17.82	1.75	2.61
6000.00	6030.00	6.73	26.82	11.81	2.14	6.10

Electrical Schematic

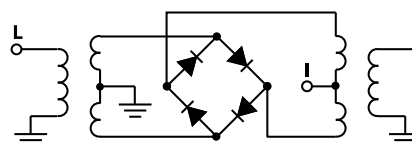

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

