

# Miniature Ceramic Fixed Attenuator

## PAT-30+

50Ω 1W 30dB DC to 7000 MHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

INPUT	1
OUTPUT	3
GROUND	2,4

### Features

- wideband, DC to 7000 MHz
- excellent VSWR, through entire band
- miniature size
- aqueous washable

### Applications

- power leveling
- impedance match improvement



Generic photo used for illustration purposes only

CASE STYLE: AF320

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost


Reel Size	Devices/Reel
7"	1000

### Electrical Specifications at 25°C

FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness, Max.	VSWR (:1) Max.			MAX. INPUT POWER (W)	
		DC-1 GHz	DC-2.5 GHz	DC-f <sub>u</sub> GHz		
f <sub>L</sub> -f <sub>u</sub>	Norm.	DC-1 GHz	DC-2.5 GHz	DC-f <sub>u</sub> GHz		
DC-7000	30±1.7	0.4	0.9	2.8	1.4 1.4 1.5	1

1. RF power at 25°C case temperature: 1 Watt. Derate linearly to 0.1 Watt at 100°C.


### Outline Drawing

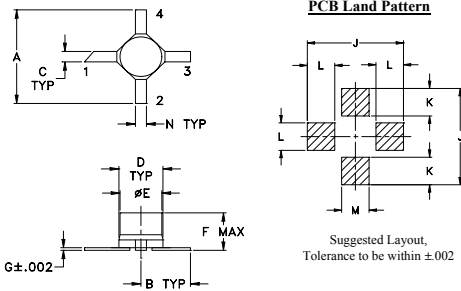

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.100	.020	.070	.068	.057	.005
5.08	2.54	0.51	1.78	1.73	1.45	0.13
H	J	K	L	M	N	wt
--	.230	.065	.060	.080	.040	grams
--	5.84	1.65	1.52	2.03	1.02	0.04

### Demo Board MCL P/N: TB-319 Suggested PCB Layout (PL-208)

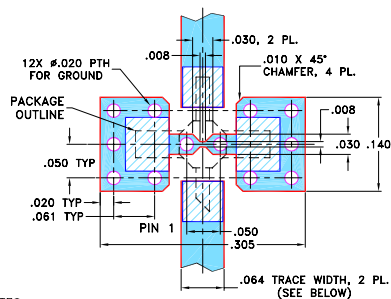

#### NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
50.00	28.59	1.06
796.25	28.65	1.08
1542.50	28.61	1.12
2288.75	28.59	1.14
3035.00	28.60	1.15
3781.25	28.38	1.15
4527.50	28.17	1.13
5273.75	28.12	1.11
6020.00	28.12	1.12
7015.00	28.05	1.20

