

Balanced to Unbalanced RF Transformer

100 to 75Ω

5 to 2800 MHz

TC1.33-282X+

Features

- suitable for tin/lead and RoHS solder systems
- wideband, 5 to 2800 MHz
- balanced transmission line
- good return loss, 20 dB typ. at 1 dB band
- excellent amplitude unbalance, 0.3 dB typ.
- aqueous washable



CASE STYLE: AT1521

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (<i>secondary/primary</i>)			1.33		Ohm
Frequency Range		5		2800	MHz
Insertion Loss*	5 - 2800		3.0		dB
	30 - 2000		2.0		
	50 - 1500		1.0		
Amplitude Unbalance	50 - 1500		0.3		dB
	30 - 2000		1.0		
Phase Unbalance	50 - 1500		6.0		Degree
	30 - 2000		6.0		

* Insertion Loss is referenced to mid-band loss, 1.0 dB typ. Measured in 75Ω system.


Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

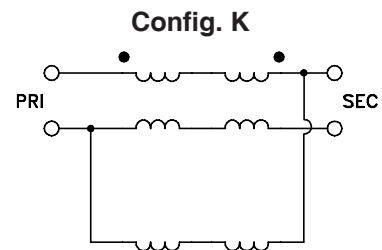


Outline Drawing

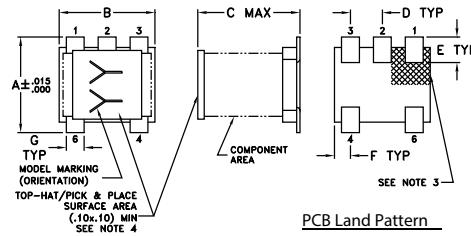

- Note:
1. Case Material Plastic
 2. Termination Finish: Tin plate over Nickel plate.
 3. Lead #1 identifier shall be located in the cross-hatched area shown, on bottom view. Identifier may be either a molded or marked feature.
 4. Top-Hat total thickness: 0.13 inches max.

PCB Land Pattern




Suggested Layout,
Tolerance to be within $\pm .002$

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5.00	1.48	17.72	0.38	3.28
10.00	1.20	21.95	0.21	2.17
30.00	1.08	27.05	0.11	0.55
50.00	1.08	28.04	0.09	0.06
100.00	1.09	28.09	0.08	1.09
500.00	0.99	24.29	0.21	5.00
1000.00	0.97	22.66	0.07	6.34
1500.00	1.20	22.41	0.71	5.18
2000.00	1.64	21.22	1.49	1.64
2400.00	2.13	17.79	2.00	3.40
2800.00	2.76	13.83	2.31	10.70

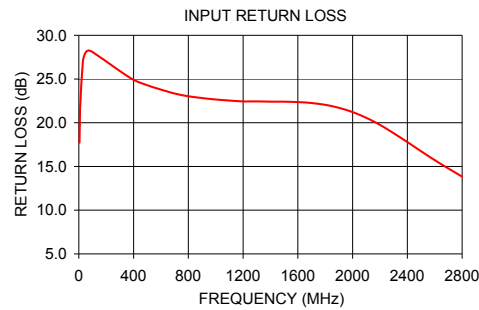

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp